



富捷科技

Product Datasheet

产品规格说明书

FRJ Series

Low Resistance Low TCR Thick Film Chip Resistor

低阻低 TCR 厚膜片式电阻器

安徽省富捷电子科技有限公司

ANHUI FOJAN ELECTRONICS TECHNOLOGY CO., LTD

安徽省马鞍山市郑蒲港新区金蒲电子产业园


JINPU ELECTRONIC INDUSTRIAL PARK, ZHENGPU PORT NEW
DISTRICT, MAANSHAN CITY, ANHUI PROVINCE

zoey@fosan.net.cn www.fosan.vip

低阻低 TCR 厚膜片式电阻器

Low Resistance Low TCR Thick Film Chip Resistor

FRJ Series

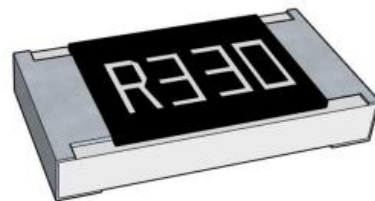

■ 特点 (Features)

- 体积小, 重量轻
- 可靠性, 高质量
- 低阻值, 适合大电流通过
- 低温度系数
- 无卤, 无铅
- 符合 RoHS
- Small size and light weight
- Reliability, high quality
- Low Resistance & Suitable for Large Current Application
- Low TCR
- Halogen free and lead free
- RoHS compliant

■ 应用 (Application)

- 娱乐: 立体声, 电视调谐器, 录音机
- 电器: 空调、冰箱
- 电脑及相关产品: 主板、掌上电脑
- 通讯设备: 手机、传真机
- 电源设备: 电源、二级照明设备
- 测量仪器: 电表、导航设备
- Entertainment: Stereo, TV tuners, Tape recorder
- Appliance: Air conditioner, Refrigerator
- Computer & relative products: Main board, PDA
- Communication equipment: Cell phone, Fax machine
- Power equipment: Power supply, II Lumination equipment
- Measuring instrument: Electric meter, Navigation equipment


■ 产品料号 (Parts Number Explanation)

示例(Example): FRJ1206J102TS


F 公司	R 产品别	J 功能别	1206 尺寸	J 公差	102 字码	T 包装别	S 端电极	特殊
FOJAN	R:Resistor	C:Normal	0402	B:±0.1%	±5%:E24	T: 7 inch reel	S: Sn	Blank; none
	C:Capacitor	P:Hi-Power	0603	C:±0.25 %	3-digits+blank	Q:10 inch reel	C: Cu	
	L: Inductor	L: Lowohmic	0805	D:±0.5%	102=1KΩ	R:13 inch reel	A: Au	
	D:Diode	A:Array	1206	F:±1%	1R0=1Ω	B:Bulk		
	A:Audion	S:Surge	1210	J:±5%	±1%&Below:			
		H:Hi-Precision	2010		E24+E96:			
		V:Hi-Voltage	2512		4-digits			
		Q:Auto-motive			1001=1KΩ			
		R:Anti-sulfur			1R00=1Ω			
		M:Metal						
	D: LED	J: Low ohmic Low TCR						
Company	Type	Functional	Size	Tolerance	Resistance	Packaging	Termination	Special



尺寸(Dimension):


尺寸 dimension					
	单位 (unit) : mm				
型别 (Type)	L	W	H	T1	T2
0402	1.00±0.10	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
0603	1.60±0.10	0.80±0.10	0.45±0.10	0.25±0.15	0.20±0.15
0805	2.00±0.10	1.25±0.10	0.55±0.10	0.35±0.20	0.40±0.20
1206	3.10±0.10	1.60±0.10	0.55±0.10	0.40±0.20	0.45±0.20
1210	3.10±0.10	2.50±0.15	0.55±0.10	0.50±0.20	0.50±0.20
2010	5.00±0.20	2.50±0.15	0.55±0.10	0.60±0.25	0.60±0.25
2512	6.30±0.20	3.20±0.20	0.55±0.10	0.65±0.25	0.65±0.25

电阻结构 (Construction)

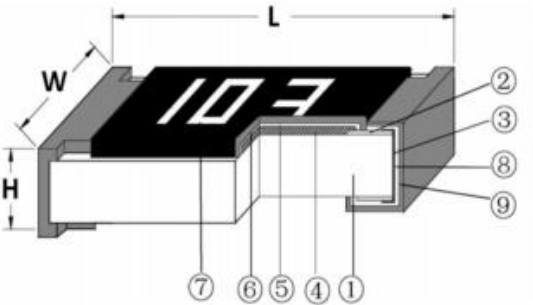	NO.	结构 construction	主要材料 Major material
	1	陶瓷基板 Ceramic substrate	氧化铝 Al ₂ O ₃
	2	阻体层 Resistive layer	金属膜层 Metal film
	3	铜电极 Cu plating layer	铜 Cu
	4	银电极 Conductive layer	银 Ag
	5	内保护层 (White≥39mΩ) (Green<39mΩ) Inner protective layer	玻璃/环氧树脂 Glass/Epoxy
	6	外保护层 Outer Protective layer	环氧树脂 Epoxy
	7	文字 Marking	环氧树脂 Epoxy
	8	侧电极 Side conductive layer	镍铬合金 NiCr
	8	镍电极 Ni plating layer	镍 Ni
	9	锡电极 Sn plating layer	锡 Matte Tin



功率衰减曲线 (Derating Curve)

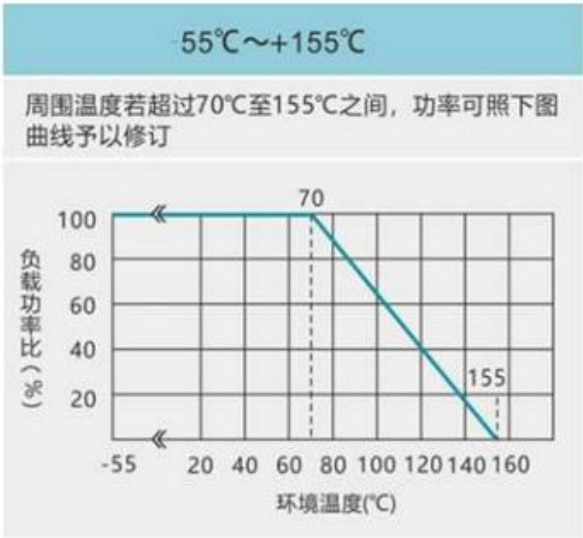

阻值范围 (Resistance range)

型别 Type	阻值范围 Resistance Range	
	1%	5%
0402	0R1~0R9Ω	0R1~0R9Ω
0603	0R1~0R9Ω	0R1~0R9Ω
0805	0R1~0R9Ω	0R1~0R9Ω
1206	0R1~0R9Ω	0R1~0R9Ω
1210	0R1~0R9Ω	0R1~0R9Ω
2010	0R1~0R9Ω	0R1~0R9Ω
1812	0R1~0R9Ω	0R1~0R9Ω
2512	0R1~0R9Ω	0R1~0R9Ω

电气特性 (Electrical characteristics)

型别 Type	额定功率 (Power Rating at 70°C)	绝缘耐压 Dielectric With standing Voltage	额定电流 Rated Current of Jumper	最大电流 Max Current of Jumper	T.C.R. (PPM/°C)	阻值范围 Resistance Range
0402	1/16W	100V	0.79A	1.97A	±100PPM/°C	0R1~0R9Ω
0603	1/10W	100V	1A	2A		
0805	1/8W	300V	1.24A	3.1A		
1206	1/4W	500V	1.58A	3.95A		
1210	1/2W	500V	2.24A	5.6A		
1812	3/4W	500V	2.73A	6.83A		
2010	3/4W	500V	2.73A	6.83A		
2512	1W	500V	3.16A	7.9A		

· 性能 (Performance Specifications)


内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
温度系数 Temperature Coefficient	JIS C 5201 4.8	$TCR = (R - R_0) / (t - t_0) R_0 \times 10^6 \text{ (ppm)}$ R_0 电阻在室温下的阻值(resistance at room temperature) R 电阻在 125°C或-55°C下的阻值(resistance at 125°C or -55°C) t_0 室温(room temperature) t 测试温度 (test temperature 125°C or -55°C)	As Spec
焊锡性 Solderability	JIS C 5201 4.17	沾助焊剂后浸入锡炉, 锡炉温度 245±5°C, 时间 3±0.5 秒。 Dip the terminal in a flux and then dip into a soldering bath at 245±5°C for 3±0.5sec.	> 95%面积上锡 (> 95% coverage)
抗焊锡热 Resist to soldering heat	MIL-STD-202 METHOD 210	沾助焊剂后浸入锡炉, 锡炉温度 260±5°C, 时间 10±0.5 秒, 测量试验前后的阻值变化率。 Dip the terminal in a flux and then dip into a soldering bath at 260±5°C for 10±0.5sec. Measure the variation of resistance.	±(1.0% +0.05Ω)
绝缘电阻 Insulation resistance	JIS C 5201 4.6	电阻本体上加载绝缘耐压 60±5 秒后, 测量绝缘阻抗。 Applied the dielectric withstanding voltage on the center of body for 60±5seconds. Then measure insulation resistance.	>10GΩ
绝缘耐压 Dielectric withstanding voltage	JIS C 5201 4.7	电阻本体上加载绝缘耐压 60±5 秒。 Applied the dielectric withstanding voltage on the center of body for 60±5seconds.	无击穿、飞弧及可见机械性损伤 No evidence of flashover, mechanical damage arcing or insulation breakdown
端子弯曲 Terminal bending	JIS C 5201 4.33	电阻焊接在测试板上进行弯折, 弯折保持时间 20±1 秒, 1206(含) 以下的尺寸弯曲 5+0.2/0 mm; 1210 以上的尺寸弯曲 2+0.2/0 mm; 量测试验前后阻值变化率 Specimen shall be mounted on test board, then bend the board and maintained for 20±1s. the distance of bending is 5+0.2/0 mm for resistors which size no larger than 1206 or 2+0.2/0 mm which size larger than 1206. Measure the variation of resistance.	±(1.00% +0.05Ω)

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
短时间过负荷 Short-time overload	JIS C 5201 4.13	加载 6.25 倍的额定功率,时间 5 秒后测量试验前后的阻值变化率。 Applied 6.25 times of rated power for 5 second. Measure the variation of resistance.	$\pm(1.0\% + 0.05\Omega)$
温度快速变化 Rapid temperature changes	JIS C 5201 4.19	电阻放入温度循环机中, T1 温度: $-55 \pm 3^{\circ}\text{C}$; T2 温度: $155 \pm 3^{\circ}\text{C}/125 \pm 3^{\circ}\text{C}$, 放置 30 分钟, 共 300 个循环。量测试验前后阻值变化率。 Put specimen in a chamber which temperature can be T1: $-55 \pm 3^{\circ}\text{C}$; T2: $155 \pm 3^{\circ}\text{C}/125 \pm 3^{\circ}\text{C}$, 30min, repeated 300 cycles. Measure the variation of resistance.	$\pm(1.00\% + 0.05\Omega)$
耐湿特性 Humidity	MIL-STD-202 METHOD 103	加载 10%额定功率, $85^{\circ}\text{C}/85\%\text{RH}$, 持续通电 1000H,试验结束 24 $\pm$ 4 小时后进行测试 1000 hours $85^{\circ}\text{C}/85\%\text{RH}$. Note: Specified conditions: 10% of operating power. Measurement at 24 $\pm$ 4 hours after test conclusion.	$\pm(0.5\% + 0.05\Omega)$
负荷寿命 Load life	MIL-STD-202 METHOD 108	电阻放入恒温箱中, 温度 $125 \pm 2^{\circ}\text{C}$, ON TIME:1.5H, OFF TIME:0.5H, 通电额定电压 1000 $+24/-0$ 小时, 量测试验前后阻值变化率。 Put the specimen in a chamber at $125 \pm 2^{\circ}\text{C}$ temperature, ON TIME:1.5H, OFF TIME:0.5H, and applied rated voltage for 1000 $+24/-0$ H. Measure the variation of resistance.	$\pm(1.0\% + 0.10\Omega)$
温湿循环 Moisture resistance	MIL-STD-202 METHOD 106	25 $^{\circ}\text{C}$ ~65 $^{\circ}\text{C}$,90~100%RH, 2.5 小时; 65 $^{\circ}\text{C}$ 90~100%RH, 3 小时; 65 $^{\circ}\text{C}$ ~25 $^{\circ}\text{C}$,80~100%RH,2.5 小时,10 个循环,试验结束 24 $\pm$ 4 小时后进行测试。 25 $^{\circ}\text{C}$ ~65 $^{\circ}\text{C}$,90~100%RH, 2.5H; 65 $^{\circ}\text{C}$ 90~100%RH, 3H; 65 $^{\circ}\text{C}$ ~25 $^{\circ}\text{C}$ 80~100%RH, 2.5H, 10 cycles, Measurement at 24 $\pm$ 4 hours after test conclusion.	$\pm(1.0\% + 0.10\Omega)$

·包装规格 (Tapping Specification)


-卷盘尺寸 (Reel dimension)

Type	Size		Unit	A	B	C	F	W
0402	7"	10K/Reel	mm	178±2.0	60.0±1.0	13.5±0.5	11.4±0.1	9.00±0.3
0402	13"	40K/50K Reel	mm	330±2.0	100.0±1.0	13.5±0.5	11.4±0.1	9.00±0.3
0603/0805/1206/1210	7"	5K/Reel	mm	178±2.0	60.0±1.0	13.5±0.5	11.4±0.1	9.00±0.3
0603/0805/1206	10"	10K/Reel	mm	254±2.0	100.0±1.0	13.5±0.5	11.4±0.1	9.00±0.3
0603/0805/1206	13"	20K/Reel	mm	330±2.0	100.0±1.0	13.5±0.5	11.4±0.1	9.00±0.3
2010/2512	7"	4K/Reel	mm	178±2.0	60.0±1.0	13.5±0.5	15.4±1.0	13.0±0.3

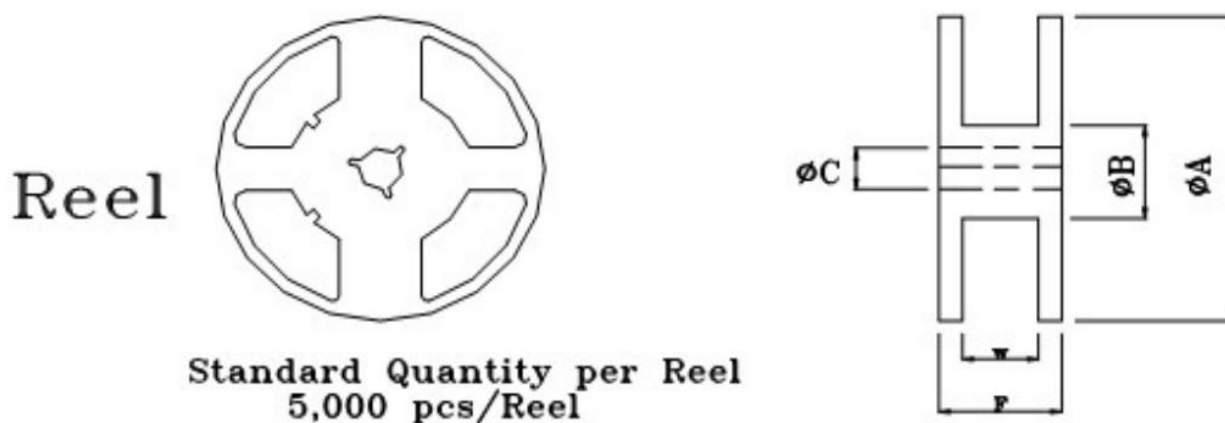

-包装尺寸 (packing dimension)

-Tapping Specifications

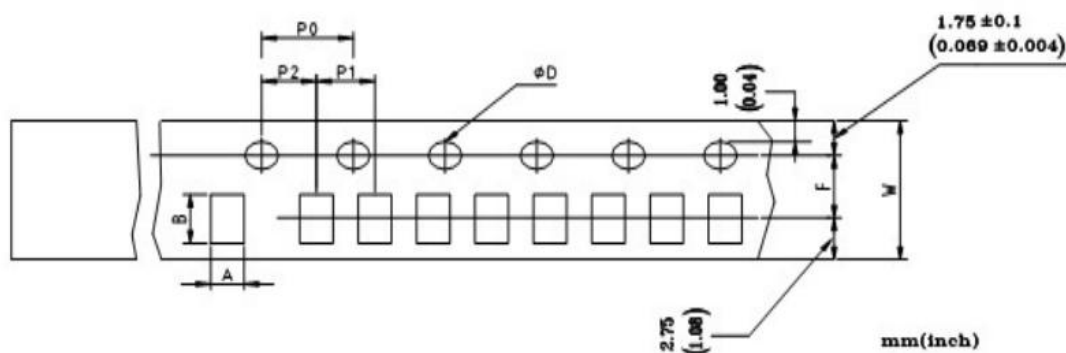


Unit: mm

Dimensions	A	B	D	F	P0	P1	P2	W
0402	0.65±0.10	1.15±0.10	1.50± _{0.0} ^{0.1}	3.50±0.05	4.00±0.10	2.00±0.10	2.00±0.05	8.00±0.20
0603	1.10±0.10	1.90±0.10	1.50± _{0.0} ^{0.1}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20
0805	1.65±0.20	2.40±0.20	1.50± _{0.0} ^{0.1}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20
1206	1.90±0.20	3.50±0.20	1.50± _{0.0} ^{0.1}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20
1210	2.80±0.20	3.50±0.20	1.50± _{0.0} ^{0.1}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20
2010	2.90±0.10	5.30±0.10	1.50± _{0.0} ^{0.1}	5.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	12.0±0.10
2512	3.40±0.10	6.60±0.10	1.50± _{0.0} ^{0.1}	5.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	12.0±0.10

■上胶带剥离力测试 (Peel force of top cover tape)


上胶带以 200mm/分钟的速度, 沿 165~180 度角的方向进行剥离, 如下图所示。纸带的剥离力范围为 10g~70g; 载带的剥离力范围为 30~100g。

The top cover tape is pulled at a speed of 200 mm/min with the angle between the tape during peel and the direction of unreeling maintained at 165 to 180 degree as following picture. The peel force of paper carrier tape shall be 0.1N to 0.7N(10 to 70 g), the peel force of plastic carrier tape shall be 0.3N to 1N (30 to 100 g)

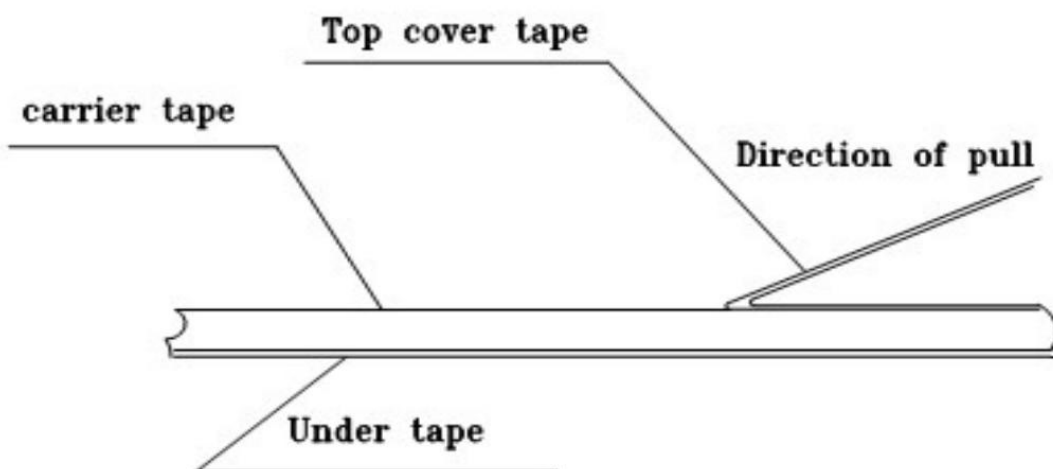


■ 焊接 (soldering)

- 建议回流焊曲线 (Recommend reflow soldering profile)

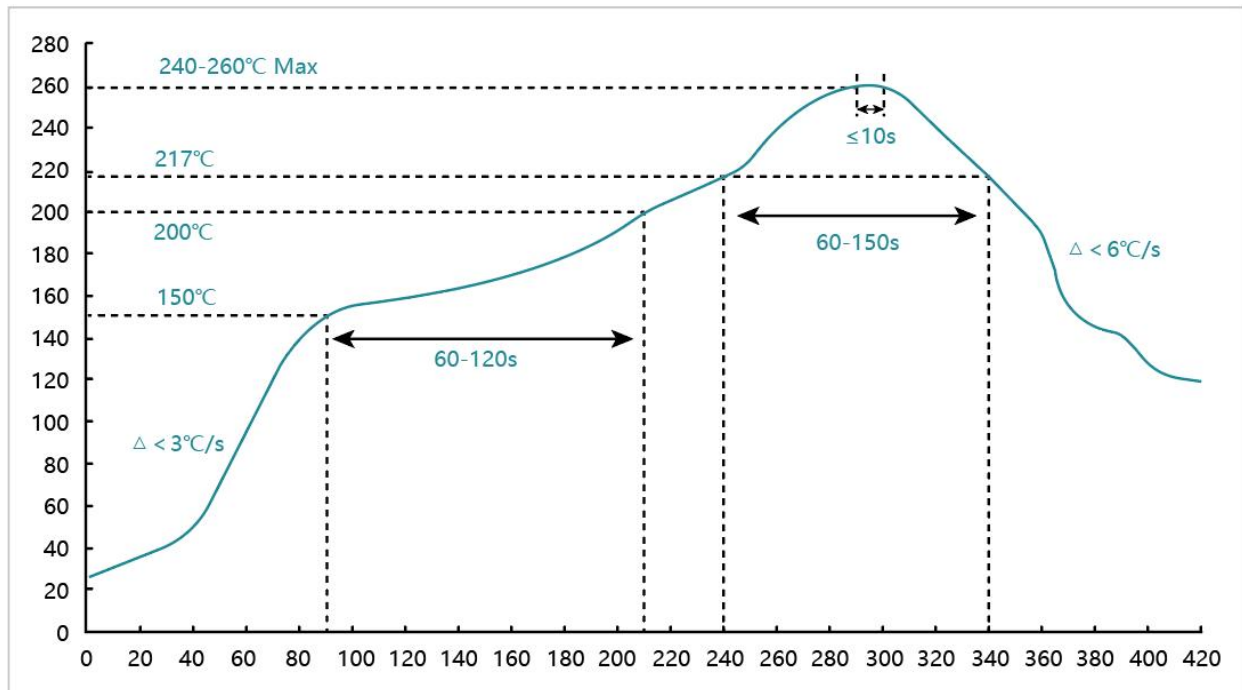

- 建议波峰焊曲线 (Recommend wave soldering profile)

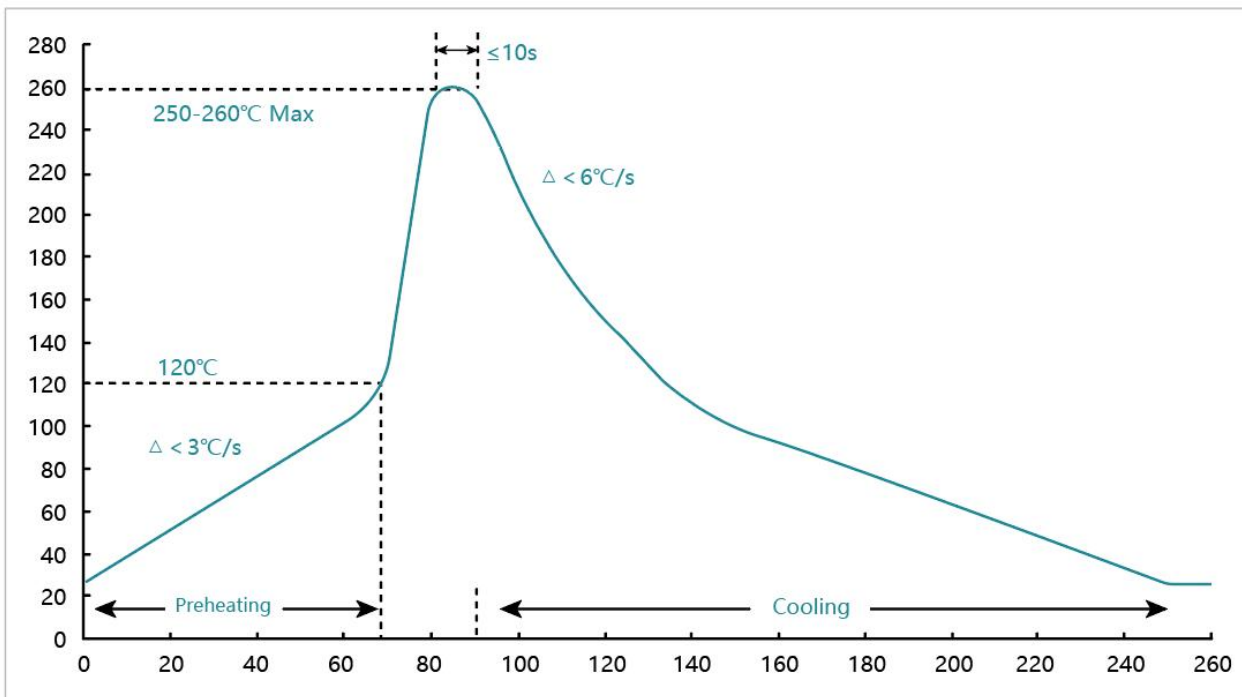


- 手工焊温度 (hand soldering temperature)

烙铁温度 $350\pm 10^{\circ}\text{C}$ 3 秒之内, 避免烙铁接触电阻本体

The iron temperature is $350\pm 10^{\circ}\text{C}$, hand soldering time less than 3S. Avoid solder iron tip direct touch the components body

■ 建议的焊盘尺寸 (Recommended pad dimensions)

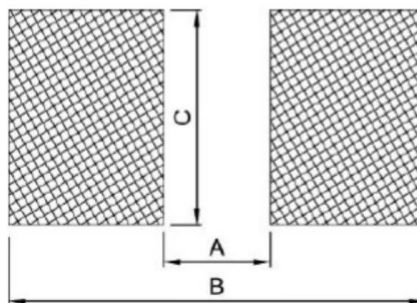

单位 : mm

Type	A	B	C
0402	0.50	1.60	0.70
0603	0.80	2.40	1.00
0805	1.30	2.90	1.45
1206	2.20	4.20	1.80
1210	2.00	4.40	2.70
2010	3.80	6.60	2.70
2512	4.90	8.10	3.40

■ 修订履历 (Revision History)

[illegible]