



富捷科技

Product Datasheet

产品规格说明书

FUS Series

High Power Alloy Shunt

FUS 系列高功率合金分流器

安徽省富捷电子科技有限公司

ANHUI FOJAN ELECTRONICS TECHNOLOGY CO., LTD

安徽省马鞍山市郑蒲港新区金蒲电子产业园


JINPU ELECTRONIC INDUSTRIAL PARK, ZHENGPU PORT NEW
DISTRICT, MAANSHAN CITY, ANHUI PROVINCE

zoey@fosan.net.cn www.fosan.vip

FUS 系列高功率合金分流器

High Power Alloy Shunt

FUS Series

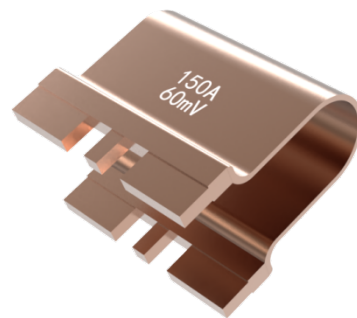

■ 特点 (Features)

- 电子束焊接工艺
- 过流能力强
- 低热电动势
- 低电感 $\leq 3\text{nH}$
- 符合 AEC-Q200 可靠性测试
- 无铅, 符合 RoHS、Reach 要求
- 特殊规格可定制
- Electron beam welding process
- Excellent current ability
- Low thermal EMF
- Low inductance $\leq 3\text{nH}$
- Complies with AEC-Q200 reliability test
- Pb-free to Meet RoHS 、Reach Requirements
- Special specifications can be customized

■ 应用 (Application)



- 用于大电流信号采样
- 动力电池管理系统
- 变频驱动与伺服驱动系统
- 仪器电源及电源测试系统
- 功率电子
- For high current signal sampling
- Power Battery Management System
- Variable frequency drives and servo drive system
- Instrument power supply and power test system
- power electronics

■ 产品料号 (Parts Number Explanation) 示例: FUS45mV200AFBKA

<u>FUS</u> 系列	<u>45m</u> 电压	<u>200A</u> 公差	<u>F</u> 公差	<u>B</u> 包装别	<u>K</u> 材质	<u>A</u> 特殊型
FOSAN Type	Unit: mV	Unit: A	D: $\pm 0.5\%$ F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$	B: Bulk	M: CuMn K: Karma	Blank: none A: type A B: type B
Type	Voltage	Current	Tolerance	Packaging	Termination	Special



尺寸 (Dimension)

产品尺寸 Product Dimension	 A型  B型 单位 (unit) : mm											
	规格 (Size)	型别 Type	Product Dimension									
			L±0.2	W±0.5	C±1.0	H±2.0	A±0.2	B±0.2	D±0.2	E±0.2	F±0.2	T±0.2
FUS-A	40A 150mV	12	25	7	24	3	5.8	1.0	1.3	6	1.2	3
	40A 100mV	18	8.4	10	33	3	5.8	1.0	1.3	6	1.2	3
	50A 75mV	18	8.4	11	33	3	5.8	1.5	1.3	6	1.2	3
	50A 100mV	18	8.4	12.5	33	3	5.8	1.0	1.3	6	1.2	3
	65A 50mV	18	8.4	15.5	25	3	5.8	1.5	1.3	6	1.2	3
	75A 50mV	18	8.4	15.5	25	3	5.8	1.7	1.3	6	1.2	3
	100A 50mV	18	8.4	15.5	17	3	5.8	1.5	1.3	6	1.2	3
	100A 75mV	18	8.4	15.5	25	3	5.8	1.5	1.3	6	1.2	3
	100A 100mV	18	8.4	16.5	33	3	5.8	1.5	1.3	6	1.2	3
	200A 100mV	18	8.4	16.5	34	3	5.8	3.0	1.5	6	1.4	4
FUS-B	45A 45mV	12	8.4	11	20	3	5.8	1.2	1.2	6	1.4	/
	80A 40mV	15	6.4	14	22	3	5.8	2.0	1.5	6	1.4	/
	100A 50mV	18	10.5	17.2	24	3	6	2.0	1.4	6	1.4	/
	100A 100mV	18	8.4	18	24	3	6	1.0	1.0	6	1.2	/
	200A 75mV	18	8.4	17	26	3	5.5	3.0	1.5	6	1.4	/
	300A 75mV	18	10.5	17.5	20	3	6	3.0	1.5	6	1.4	/

■ 电气特性 (Electrical characteristics)

型别 Type	阻值 Resistance (mΩ)	材质 Element Material	T.C.R. (20°C~120°C) (PPM/°C)	负载电流 Load current (A)	精度 Tolerance (%)	使用温度范围 Operating Temperature (°C)
FUS-A	0.1-10	Karma	±50、±100	200	0.5%、±1%、 ±2%、±5%	-55~170
FUS-B		CuMn				

如有非标准品的需求,请联系我们的业务部门 For non-standard parts, please contact our sales dept.

■ 印字标识 (Marking)

例:

100A 50mV

100A: 电流 100A 50mV: 电压 50mV

E.g.,

100A 50mV


100A: Current 100A 50mV: Voltage 50mV

■ 性能 (Performance)

Test Items 测试项目	Reference 依据标准	Conditions of Test 测试条件	Test Limits 测试结果
Temperature Coefficient of Resistance 温度系数	AEC-Q200 TEST 19 IEC 60115-1 4.8	Measuring points -55°C and +120°C, reference point +20°C 测量点-55°C和+120°C, 参考点+20°C	见图表
High Temperature Exposure (Storage) 高温存储	AEC-Q200-REV D-Test 3 MIL-STD202 Method 108	T=170°C,1000hrs, Measurement at 24hrs after test conclusion. 170°C, 1000 小时, 测试结束后 24 小时测量。	$\Delta R \leq \pm 1\%$
Temperature Cycling 温度循环	AEC-Q200-REV D-Test 4 JESD22 Method JA-104	1000 Cycle (-55°C to 125°C) Measurement at 24hrs after test conclusion. 1000 次循环 (-55°C至 125°C) 测试结束后 24 小时进行测量。	$\Delta R \leq \pm 0.5\%$
Short time overload 短时过载	IEC60115-1 4.13	5 X rated power for 5s 5 倍额定功率,5 秒	$\Delta R \leq \pm 0.5\%$
Biased Humidity 高温高湿	AEC-Q200-REV D-Test 7 MIL-STD-202 Method 103	10% Rated power at 85°C, RH:85%, 1000Hrs,Measurement at 24hrs after test conclusion. 10%额定功率, 85°C, 相对湿度: 85%, 1000 小时, 测试结 束后 24 小时测量。	$\Delta R \leq \pm 0.5\%$
Load Life 负载寿命	AEC-Q200-REV D-Test 8 MIL-STD-202 Method 108	1000 h at +70 °C, 1.5 h "ON" , 0.5 h "OFF" , Measurement at 24hrs after test conclusion. 1000 小时, +70 °C, 1.5 小时"开启", 0.5 小时"关闭", 测试 结束后 24 小时测量。	$\Delta R \leq \pm 1\%$
Resistance to Soldering Heat 耐焊接热	AEC-Q200-REV D-Test 15 MIL-STD-202 Method 210	T=260±5°C solder,10±1 sec dwell 260±5°C焊接, 停留 10±1 秒。	$\Delta R \leq \pm 0.5\%$


Mechanical Shock 机械冲击	AEC-Q200-REV D-Test 13 MIL-STD-202 Method 213	100g's, Normal duration is 6ms, half sine shock pulse 正半弦波, 峰值加速度 100g's, 脉冲持续 6ms, 三轴六向各 3 次。	$\Delta R \leq \pm 0.5\%$
Solderability 可焊性	AEC-Q200-REV D-Test 18 J-STD-002	Dip the terminal in a flux and then dip into a soldering bath at $245 \pm 5^\circ\text{C}$ for $3 \pm 0.5\text{sec}$ 沾助焊剂后浸入锡炉, 锡炉温度 $245 \pm 5^\circ\text{C}$, 时间 3 ± 0.5 秒。	> 95% area covered > 95% 面积上锡

功率衰减曲线 (Derating Curve)

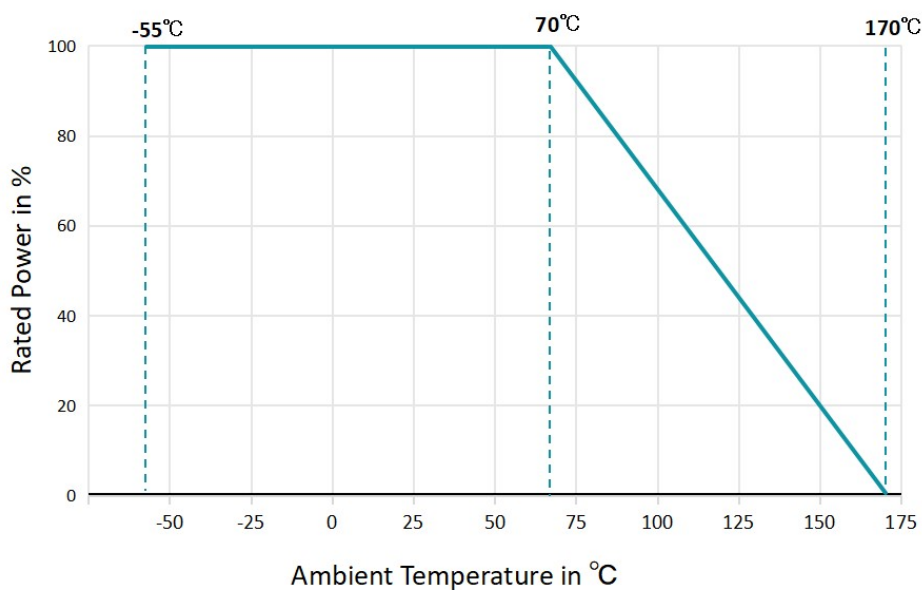


焊接 (soldering)

- 建议回流焊曲线 (Recommend reflow soldering profile)

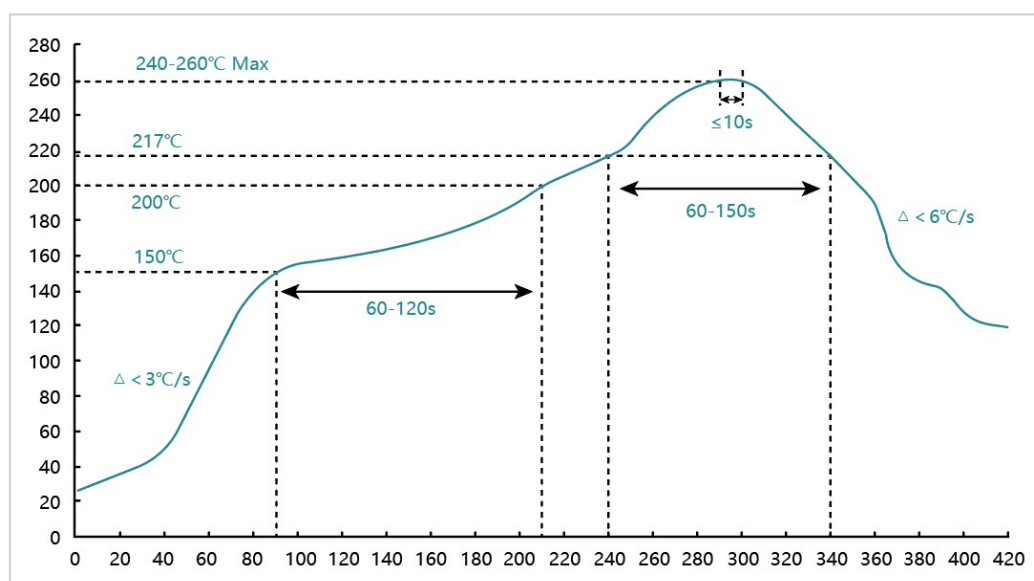

- 建议波峰焊曲线 (Recommend wave soldering profile)

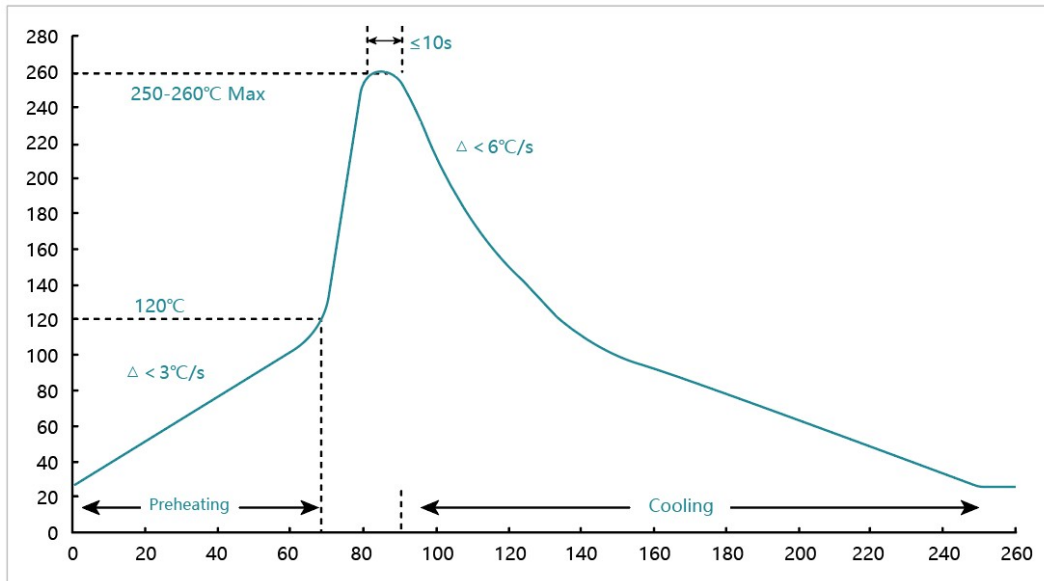

- 手工焊温度 (hand soldering temperature)

烙铁温度 $350 \pm 10^\circ\text{C}$ 3 秒之内, 避免烙铁接触电阻本体

The iron temperature is $350 \pm 10^\circ\text{C}$, hand soldering time less than 3S. Avoid solder iron tip direct touch the components body

■ 包装规格 (Tapping Specification)

- 散装或盘装 Bulk or tray

■ 合金电阻器使用说明 (Alloy Resistor Instructions for use)

本产品以下特殊环境下应用, 性能可能会受到影响:

(Application of the products in a special environment can deteriorate product performance) :

1. 高温;
High temperature
2. 有海风或腐蚀性气体, 包括氯气, 硫化氢, 氨气, 二氧化硫, 二氧化氮等;
Near the sea, or corrosive gas, such as $\text{Cl}_2, \text{H}_2\text{S}, \text{NH}_3, \text{SO}_2$, and NO_2 , etc;
3. 各种类型的液体, 包括水, 油, 化学品, 有机溶剂的使用;
Unverified liquids, such as water, oil, chemical or organic solvent;
4. 在用树脂或其他涂层材料密封产品的情况下使用;
Unverified resin or paint to cover products;
5. 焊接后使用不洁焊剂或使用水或水溶性清洁剂清洗产品
Products should be washed with soluble cleaner even if non cleaning flux.

- 储存 / 搬运条件 (Storage / Carry conditions)

1. 储存温度 $25 \pm 5^\circ\text{C}$ Temperature: $25 \pm 5^\circ\text{C}$
2. 湿度 30~70%RH Humidity: 30~70%RH
3. 储存期限: 先进先出, 2 年 Storage life: 2 years FIFO
4. 存放和搬运时, 请保持盒子的正确方向。严禁跌落在箱体上, 否则可能损坏产品电极或本体
Please hold box correct orientation when storing and carrying. It is strictly prohibited to fall on the box. otherwise the product electrode or body may be damaged.



■ 修订履历 (Revision History)

[illegible]